AirTies
wireless networks

KablosuzVeriSesGörüntü

AIRTIES NSW-105
Ethernet Switch
5 port 10/100 Mbps

3 YEAR

Experience the AirTies difference in your Switch applications, too

With the AirTies NSW-105 5-Port 10/100 Mbps Ethernet Switch, you can meet your networking needs and provide maximum performance, especially in the office. You can easily include it in network environments with heavy traffic and expand your network without having to make any changes to the existing infrastructure. Moreover, no configuration is needed: just plug it in and turn it on.
A perfect solution for corporate networks with its 100 Mbps Ethernet speed, the NSW-105 allows you to expand your network to include as many Ethernet compatible devices (computers, network printers, IP Cameras, etc.) as you want without needing to reconfigure them.

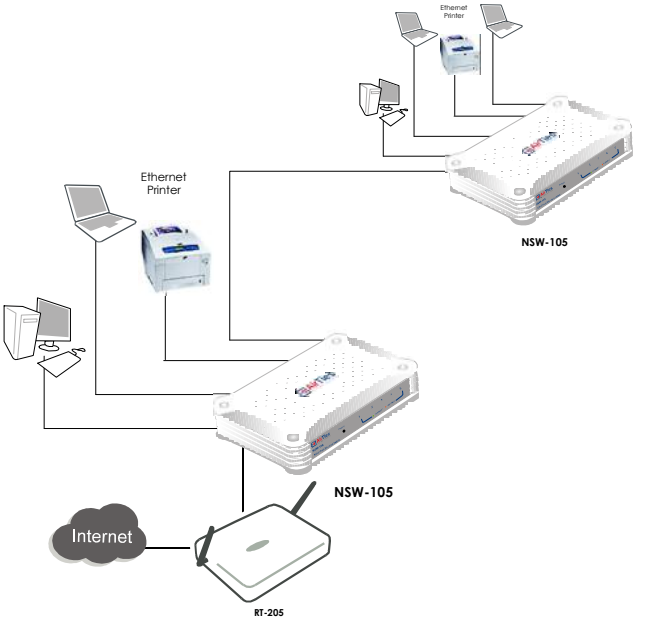

Features

Main Features

- **With the Auto MDI/MDI-X feature,** it automatically detects the connection type of the remote device and adjusts itself to work seamlessly without user intervention.
- **Store and Forward feature** ensures data integrity on your network, prevents packet loss and delay.
- **Full- / Half-Duplex operating modes** provide automatic speed configuration based on the speed (100Mbps or 10 Mbps) supported by the connected device.
- **Back-Pressure support for Half-Duplex** mode provides increased performance for even 10 Mbps connections.
- **Uplink from any port**
- **LED indicators:** Power indicator and Link/Act indicators that also show transmission speed (Green for 100 Mbps, Orange for 10 Mbps).
- **Robust against voltage fluctuations:** Designed and developed to withstand wide voltage fluctuations.
- **7 /24 AirTies Call Center and Technical Support** (and support by the AirTies R&D team when necessary)
- **3-year extended warranty**

Technical Specifications

- **Connection Standards:** IEEE 802.3 10Base-T, IEEE 802.3u 100Base-T, Auto-Negotiation feature; 10/100 Mbps operation, Full/Half Duplex operation, Flow Control for Full-Duplex operation, Back-Pressure support for Half-Duplex operation, Auto MDI/MDI-X
- **Topology:** Star
- **Transmission Method:** Store and Forward
- **Interfaces:** 10 BASE-T: Twisted-Pair UTP/STP CAT. 3,4,5 or higher
  100 BASE-T: Twisted-Pair UTP/STP CAT. 5 or higher
- **Standards:** CE

Physical Characteristics

- **Dimensions:** 150mm x 110mm x 35mm
- **Weight:** 220 grams
- **Power:** 7.5V/1A(AC-DC)
- **Operating Temperature:** 0°C ~ 40°C
- **Storage Temperature:** -10°C ~ 70°C
- **Humidity:** %5 - %90 non-condensing

Minimum System Requirements

- A computer with an Ethernet card and running any version of Windows, UNIX, Linux, or Mac operating systems.

Package Contents

- AirTies NSW-105 5 Port 10/100 Ethernet Switch
- Power adapter
- User Manuel

AirTies Wireless Networks
Phone : +90 212.444 0 239 Fax : +90 212.318 62 98
E-Mail: info@airties.com | www.airties.com